
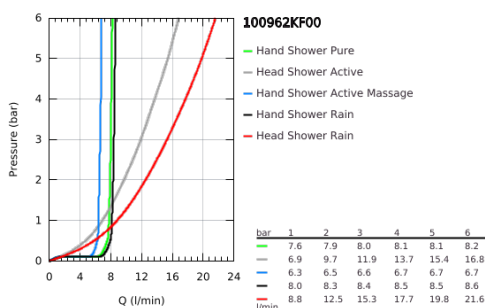


## 10 096 2KF 00 RAINSHOWER AQUA PURE SHOWER SYSTEM WITH THERMOSTAT FOR WALL MOUNTING

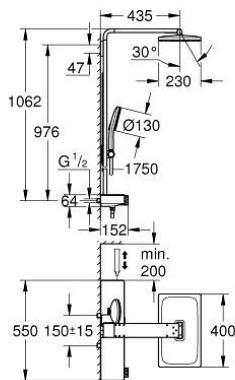

### TOOTE KIRJELDUS (1/2)


- Värvus: phantom black
- consisting of:
  - horizontal 435 mm shower arm
  - exposed SmartControl thermostat with metal housing
  - allows change between:
    - head shower Rainshower Aqua Duo square 400 x 230 mm, black acrylic spray plate
    - swing angle 0° - 30°
  - 2 spray patterns:
    - GROHE PureRain, ActiveRain
  - hand shower Rainshower Aqua 130 (101 676), black acrylic spray plate
  - 3 spray patterns:
    - GROHE Rain, Rain+ and ActiveMassage
  - adjustable in height with gliding element
  - initial Rainshower Aqua Pure unit (101 672 9990) enclosed
  - shower hose 1750 mm
- GROHE Rainshower Aqua Pure removes chlorine and odor (hand shower)
- GROHE SmartTip showering spray selection via push of a ring
- GROHE Water Saving - Less water, perfect flow
- maximum flow rate (at 3 bar): 15 l/min
- GROHE SmartControl with recessed metal buttons, push for ON-OFF, turn for volume adjustment from GROHE Water Saving to full flow
- GROHE ProGrip Metal with knurl structure
- GROHE TurboStat compact cartridge with wax thermoelement
- GROHE SafeStop at 38°C
- GROHE SafeStop Plus optional temperature limiter at 43°C included
- integrated GROHE EasyReach shower tray (black glass)
- GROHE DreamSpray perfect spray pattern
- GROHE Long-Life finish
- SpeedClean anti-lime system
- Inner WaterGuide for a longer life
- TwistStop to prevent hose from twisting
- GROHE CoolTouch prevents scalding on hot surfaces

## 10 096 2KF 00 **RAINSHOWER AQUA PURE SHOWER SYSTEM WITH THERMOSTAT FOR WALL MOUNTING**

### **TOOTE KIRJELDUS** (2/2)

- suitable for instantaneous heaters from 18 kW/h
- minimum flow rate 5 l/min.
- min. recommended pressure 1.0 bar
- internal 6 V lithium battery (42 886 000) type CR-P2
- battery lifetime approx. 10 years
- replacement filter: Rainshower Aqua Pure unit (101 672 9990)
- optional: Rainshower Aqua glass shelf (101 677)
- to change the filter, a minimum distance of 20 cm from the right-hand side wall must be maintained

## 10 096 2KF 00 RAINSHOWER AQUA PURE SHOWER SYSTEM WITH THERMOSTAT FOR WALL MOUNTING

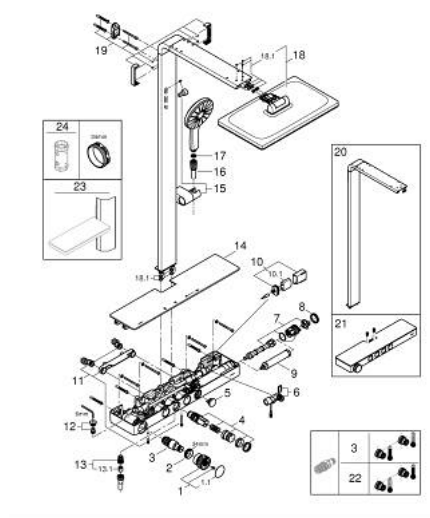

**VARUOSAD**, november 2022 – nüüd

- 1: temperature control handle (Tellimuse number 108445KF00)
- 1.1: cap (Tellimuse number 108446KF00)
- 2: Fitting ring (Tellimuse number 47743000)
- 3: Thermostatic compact cartridge 1/2" (Tellimuse number 47439000)
- 4: Pushbutton incl. cartridge (Tellimuse number 108447KF00)
- 5: pushbutton filter (Tellimuse number 108448KF00)
- 6: flow sensor (Tellimuse number 1084529990)
- 7: filter lock incl. dummy (Tellimuse number 1084519990)
- 8: cap filter (Tellimuse number 108449KF00)
- 9: Unit for Rainshower Aqua Pure shower systems (Tellimuse number 1016729990)
- 10: Battery housing (Tellimuse number 42393000)
- 10.1: Battery (Tellimuse number 42886000)
- 11: S-Union 1/2" X 3/4" (Tellimuse number 1084559990)
- 12: non-return valves (Tellimuse number 108460999M)
- 13: outlet nipple (Tellimuse number 108454AL00)
- 13.1: Non-return valve (Tellimuse number 08565000)
- 14: cover (Tellimuse number 108484K000)
- 15: glider (Tellimuse number 108592KF00)
- 16: Shower hose (Tellimuse number 28388KF1)
- 17: Dirt strainer (Tellimuse number 0700200M)
- 18: spare head shower (Tellimuse number 108652KF00)
- 18.1: set of replacement parts (Tellimuse number 108603KF00)
- 19: shower rail holder (Tellimuse number 108588KF00)
- 20: exchange shower system (Tellimuse number 108558KF00)
- 21: exchange-thermostat (Tellimuse number 108549KF00)
- 22: GROHE TurboStat cartridge 1/2" (Tellimuse number 47175000)\*
- 23: Shelf (Tellimuse number 101677KF00)\*
- 24: Socket spanner (Tellimuse number 19332000)\*

\* Lisatarvikud