


## 20 614 SD0 ATRIO ICON 3D 3-HOLE WALL-MOUNT BASIN MIXER




### TOOTE KIRJELDUS

- Värvus: stainless steel
- open spout for pure laminar water flow
- red and blue markings on handles for hot and cold water
- valves hot/cold with ceramic headparts
- pressure-proof, flexible connection hoses between spout and side valves
- projection 235 mm
- technical data
- flow pressure min 0.5 bar
- recommended pressure 1.0 - 5.0 bar
- if static pressure is more than 5 bar fit pressure reducer
- avoid major pressure differences between cold and hot water supply
- flow rate at 3 bar flow pressure: approx. 5 l/min
- max. temperature hot water inlet: 80°C
- recommended temperature hot water inlet (energy saving): 60°C

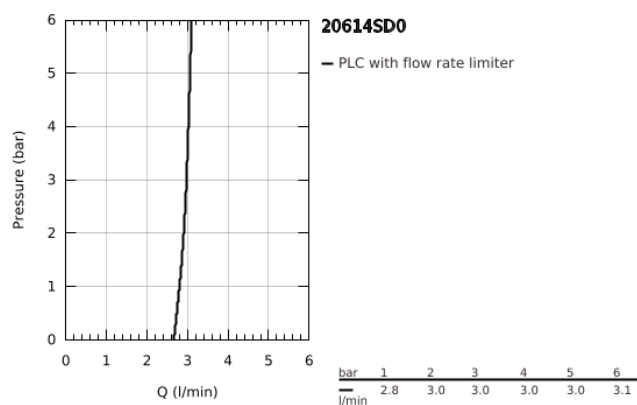

## 20 614 SD0 ATRIO ICON 3D 3-HOLE WALL-MOUNT BASIN MIXER

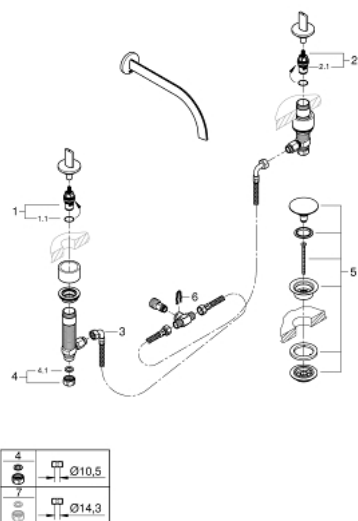

### VARUOSAD, aprill 2020 – nüüd

- 1: Ceramic headpart, 1/2" (Tellimuse number 45882000)
- 1.1: O-ring Ø 18.2 x Ø 1.7 (Tellimuse number 0392400M)
- 2: Ceramic headpart, 1/2" (Tellimuse number 45883000)
- 2.1: O-ring Ø 18.2 x Ø 1.7 (Tellimuse number 0392400M)
- 3: Flexible connection hose (Tellimuse number 45704000)
- 4: Coupling nut 1/2" (Tellimuse number 1290100M)
- 4.1: Fibre seal Ø 18,5 x Ø 12 x 2 (Tellimuse number 0138900M)
- 5: Waste set with push-open plug (Tellimuse number 65807000)
- 6: Fixing clamp (Tellimuse number 6554100M)
- 7: Coupling nut 1/2" x 14.5 mm (Tellimuse number 1290200M)\*

\* Lisatarvikud