


## 24 135 DC3 **ATRIO THERMOSTATIC SHOWER MIXER FOR 2 OUTLETS WITH INTEGRATED SHUT OFF/DIVERTER VALVE**

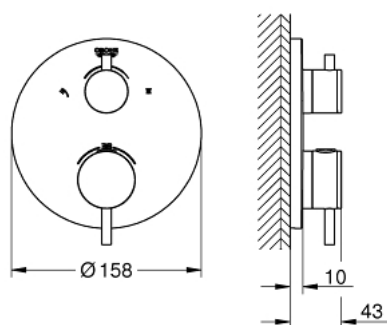

### TOOTE KIRJELDUS

- Värvus: supersteel
- set for final installation for
- GROHE Rapido SmartBox 35 600/35 604
- GROHE TurboStat compact cartridge with wax thermoelement
- GROHE Long-Life finish
- wall escutcheon with GROHE FastFixation (covered escutcheon- and shaft sealing, covered fixing)
- metal escutcheon, retroactively 6° adjustable
- printed head and hand shower symbol
- GROHE SafeStop at 38°C
- GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included
- GROHE AquaDimmer, integrated shut off/diverter valve
- metal handles
- flow performance: outlet B = 27 l/min outlet C = 30 l/min
- without roughing-in-set

## 24 135 DC3 **ATRIO THERMOSTATIC SHOWER MIXER FOR 2 OUTLETS WITH INTEGRATED SHUT OFF/DIVERTER VALVE**



### **VARUOSAD**, jaanuar 2018 – nüüd

- 1: Mounting plate (Tellimuse number 49080000)
- 2: Temperature control handle (Tellimuse number 49089DC0)
- 3: Escutcheon (Tellimuse number 49074DC0)
- 4: Shut-off handle Aquadimmer (Tellimuse number 49090DC0)
- 5: Aquadimmer (Tellimuse number 49084000)
- 6: Thermostatic compact cartridge 3/4" (Tellimuse number 49028000)
- 7: Non-return valve (Tellimuse number 49085000)
- 8: Seal (Tellimuse number 48360000)
- 9: GROHE TurboStat cartridge 3/4" (Tellimuse number 49003000)\*
- 10: Service stops (Tellimuse number 1405300M)\*
- 11: Socket spanner (Tellimuse number 49059000)\*
- 12: Backflow protection combination (DIN-EN1717) (Tellimuse number 14055000)\*
- 13: Universal extension set 2-handle thermostats, 25 mm (Tellimuse number 14058000)\*

\* Lisatarvikud