
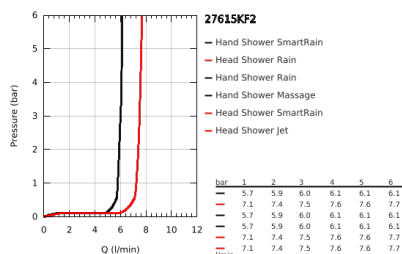


## 27 615 KF2 EUPHORIA SYSTEM 260 SHOWER SYSTEM WITH THERMOSTATIC MIXER FOR WALL MOUNTING

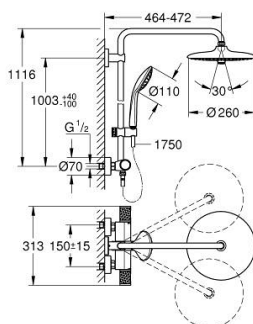

### TOOTE KIRJELDUS

- Värvus: phantom black
- consisting of:
  - horizontal swivable 450 mm shower arm
  - exposed thermostat with Aquadimmer function
  - allows change between:
    - head shower Euphoria 260
    - 3 spray patterns:
      - Rain, SmartRain, Jet
    - maximum flow rate (at 3 bar): 7.5 l/min
    - with ball joint
    - rotation angle  $\pm 15^\circ$
    - hand shower Euphoria 110 Massage
      - 3 spray patterns:
        - Rain, Massage, SmartRain
      - maximum flow rate (at 3 bar): 8.5 l/min
      - adjustable in height with gliding element
  - Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388)
  - GROHE TurboStat compact cartridge with wax thermoelement
  - GROHE SafeStop at 38°C
  - GROHE SafeStop Plus optional temperature limiter at 43°C included
  - GROHE CoolTouch no risk of scalding
  - GROHE ProGrip with knurl structure
  - GROHE Water Saving - Less water, perfect flow
  - GROHE DreamSpray perfect spray pattern
  - GROHE SprayDimmer (Stepless flow rate reduction)
  - GROHE FastFixation upper bracket adjustable
  - Inner WaterGuide for a longer life
  - SpeedClean anti-lime system
  - TwistStop to prevent hose from twisting
  - suitable for instantaneous heaters from 18 kW/h
  - minimum flow rate 5 l/min.
  - optional upgrade: GROHE EasyReach tray (26 362)
  - professional edition