


## 29 904 LS0 GROHTHERM SMARTCONTROL THERMOSTAT FOR CONCEALED INSTALLATION WITH 3 VALVES




### TOOTE KIRJELDUS

- Värvus: moon white/chrome
- set for final installation for
- GROHE Rapido SmartBox 35 600/35 604
- metal wall escutcheon with GROHE FastFixation (covered escutcheon and shaft sealing, covered fixing), retroactively 6° adjustable
- GROHE Long-Life finish
- GROHE SmartControl push for ON-OFF, turn for volume adjustment from GROHE Water Saving to Full Flow
- exchangeable symbols
- GROHE TurboStat compact cartridge with wax thermoelement
- GROHE ProGrip with knurl structure
- GROHE SafeStop at 38°C
- GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included
- built-in non return valves and dirt strainers
- multiple outlets can be run simultaneously
- cover plate in moon white acrylic glass
- without roughing-in-set
- flow performance: outlet A = 23 l/min outlet B = 27 l/min outlet C = 23 l/min outlet A + B = 33 l/min outlet A + B + C = 36 l/min

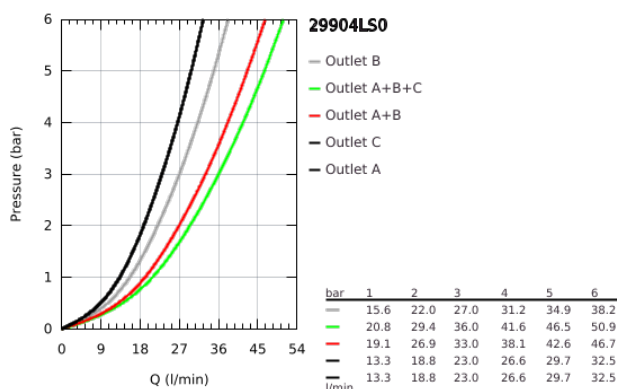

## 29 904 LS0 GROHTHERM SMARTCONTROL THERMOSTAT FOR CONCEALED INSTALLATION WITH 3 VALVES

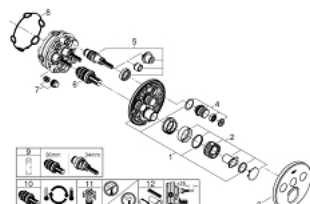

**VARUOSAD**, september 2016 – nüüd

- 1: Mounting plate (Tellimuse number 48362000)
- 2: Temperature control handle (Tellimuse number 49029000)
- 2.1: Cover cap (Tellimuse number 1015030000)
- 2.2: handle adaptor (Tellimuse number 1015059990)
- 3: Escutcheon (Tellimuse number 49036LS0)
- 4: Push button (Tellimuse number 48361000)
- 4.1: pushbutton (Tellimuse number 14077000)
- 5: Cartridge (Tellimuse number 48359000)
- 5.1: Spindle (Tellimuse number 49088000)
- 6: Thermostatic compact cartridge 3/4" (Tellimuse number 49028000)
- 7: Non-return valves (Tellimuse number 47979000)
- 8: Seal (Tellimuse number 48360000)
- 9: Socket spanner (Tellimuse number 49059000)\*
- 10: GROHE TurboStat cartridge 3/4" (Tellimuse number 49003000)\*
- 11: Service stops (Tellimuse number 1405300M)\*
- 12: Universal extension set single-lever mixers, 25 mm (Tellimuse number 14048000)\*

\* Lisatarvikud