



## 38 622 001 **RAPID SL ELEMENT FOR WC, 1.00 M INSTALLATION HEIGHT**

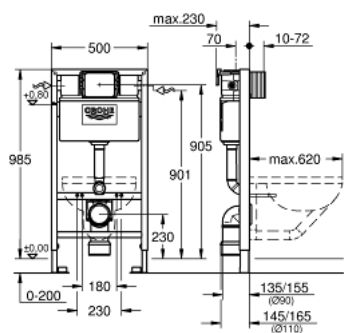

### TOOTE KIRJELDUS

- with flushing cistern 6 - 9 l
- for on-the-wall installations or studded walls
- powder coated steel frame, self-supporting
- for dry-cladding, completely pre-assembled
- with fixed connections
- quick adjustment, lockable
- fixing material
- TÜV approved
- 2 WC fixing bolts
- fixing device for ceramic
- WC ceramics with small bearing area (< 205 mm) require additional accessory 38 779 000
- distance of fixing bolts 180/230 mm
- outlet bend Ø 90 mm
- inlet and outlet connecting set
- depth adjustable
- reducer Ø 90/110 mm
- flushing cistern 6 - 9 l containing the following features:
  - pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop or single flush
  - front or top actuation
  - water supply from left/right or back
  - low noise (group I acc. to German Noise Specification)
  - angle valve 1/2"
  - insulated against condensation
  - water inlet with pipe fixation
  - shortable inspection shaft incl. protection during construction phase
  - including wall brackets 38 558 00M for on-the-wall installation
  - for mounting of small flush plates please order revision shaft 40 950 000 (sold separately)
  - including adapter 38 338 000

## 38 622 001 **RAPID SL ELEMENT FOR WC, 1.00 M INSTALLATION HEIGHT**

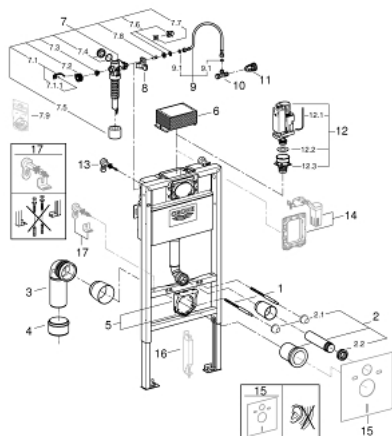

**VARUOSAD**, november 2012 – nüüd

- 1: Threaded bolt (Tellimuse number 4276400M)
- 2: WC inlet and outlet connecting set (Tellimuse number 37311K00)
- 2.1: Basin fastening (Tellimuse number 43511SH0)
- 2.2: Connector (Tellimuse number 37119000)
- 3: PP-outlet bend Ø 90 mm (Tellimuse number 42327000)
- 4: Reducer (Tellimuse number 42242000)
- 5: Support for outlet bend (Tellimuse number 42243000)
- 6: Inspection shaft for flushing cistern (Tellimuse number 42326000)
- 7: Filling valve (Tellimuse number 37095000)
- 7.1: Lever (Tellimuse number 43734000)
- 7.1.1: Seal (Tellimuse number 4377000M)
- 7.2: Valve head (Tellimuse number 43536000)
- 7.3: Membrane (Tellimuse number 4375800M)
- 7.4: Screw cap (Tellimuse number 43735000)
- 7.5: Valve float, 5 pcs. (Tellimuse number 4379100M)
- 7.6: Set of seals (Tellimuse number 43722000)\*
- 8: Support device (Tellimuse number 42195000)
- 9: Tube (Tellimuse number 42397000)
- 9.1: Sealing washer (Tellimuse number 0319100M)
- 10: Angle valve (Tellimuse number 42396000)
- 11: Connecting box (Tellimuse number 38338000)
- 12: Discharge valve AV1 complete (Tellimuse number 42314000)
- 12.1: Pneumatic hose (Tellimuse number 42319000)
- 12.2: Seal (Tellimuse number 42310000)
- 12.3: Valve seat for GD2 (Tellimuse number 42315000)
- 13: Wall brackets (Tellimuse number 3855800M)
- 14: Retro-fit set (Tellimuse number 38796000)\*
- 15: Set for noise protection (Tellimuse number 37131000)\*
- 16: Accessory (Tellimuse number 38779000)\*
- 17: Xtra wall brackets, flexible placing (Tellimuse number 38733000)\*

\* Lisatarvikud