


## 38 748 002 **RAPID SL ELEMENT FOR WASH BASIN WITH ROUGH-IN SET FOR INFRA-RED ELECTRONIC**




### TOOTE KIRJELDUS

- for wall mounted fittings
- suitable for trim sets Europlus E 36 042 SD0, Essence E 36 447 000 and Eurocube E 36 442 000
- 1.13 m installation height
- for on-the-wall installations or studded walls
- powder coated steel frame, self-supporting
- for dry-cladding, completely pre-assembled
- quick adjustment, lockable
- fixing material
- wash basin fixing bolts M10 with fixing device for ceramic
- variable distance of fixing bolts
- HT-outlet bend Ø 50 mm
- seal Ø 32 mm
- pre-mounted roughing-in set with protecting block
- fire-proof pipe for laying electronic cables
- installation box with water group, stop valve and flush elbow
- connection with noise protected fitting holder 1/2"
- connecting box for mains supply 230 V
- CE approved
- for installation with pre-mixed or cold water
- for on-the-wall installation please order wall brackets 38 558 00M (sold separately)

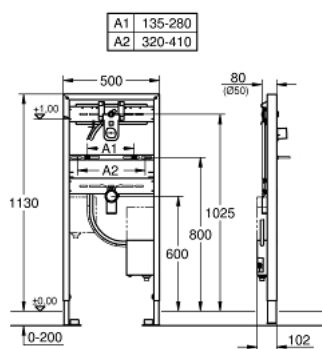

## 38 748 002 **RAPID SL ELEMENT FOR WASH BASIN WITH ROUGHIN-IN SET FOR INFRA-RED ELECTRONIC**

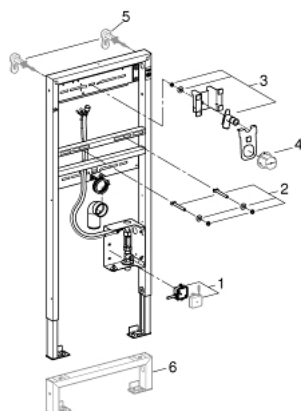

**VARUOSAD**, september 2016 – nüüd

1: Switching power supply (Tellimuse number 42470000)

2: Threaded bolt (Tellimuse number 42247000)

3: Fitting connection (Tellimuse number 42944000)

4: Inspection shaft (Tellimuse number 42398000)

5: Wall brackets (Tellimuse number 3855800M)\*

6: Extension (Tellimuse number 38629000)\*

\* Lisatarvikud