


38 987 000 FLUSHING CISTERN GD 2

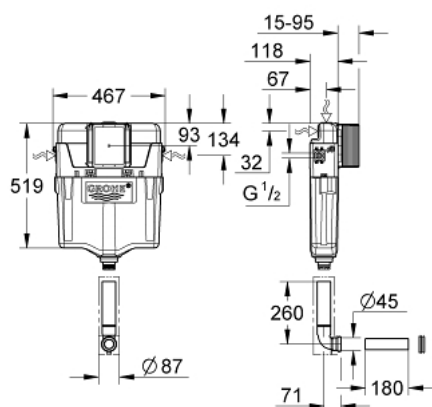

TOOTE KIRJELDUS

- 6 - 9 l adjustable
- adjustment ex factory 6 l and 3 l
- pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop or single flush
- water supply from left/right/back or top
- low noise (group I acc. to German Noise Specification)
- insulated against condensation
- 1/2" water supply connection including integrated angle valve and push fit flexible hose union
- no tools required for the installation of the inspection shaft incl. protection during construction phase
- flush pipe insulated against condensation
- fixing brackets
- without wall plate/actuation
- GROHE Water Saving - Less water, perfect flow
- with inlet pipe and connector
- for mounting of small flush plates please order revision shaft 40 911 000 (sold separately)